

LOADMASTER™



CITY VIEW
SPECIALTY VEHICLES

EnviroMaster DT



Crush the Competition

The **Enviromaster DT** is Loadmaster's dual tailgate rear loader designed to fit any dual stream collection route. Proudly made in the USA with Loadmaster's long-standing reputation of reliability and robustness.





416.249.4500 | cityviewvehicles.com




Inner Tailgate Remote Zerks

Proper lubrication of body components is important. We made the inner Tailgate Remote Zerks standard so you can easily maintain your equipment. In combination with our Triple Tailgate and Sweep Base End remote Zerks and our Ejector Remote Zerk options the complete truck can be greased from the ground.




Independent Tailgate Controls

Simplicity enhances reliability. We have made each tailgate its own independent system to conveniently place packing controls on the outside of each tailgate.

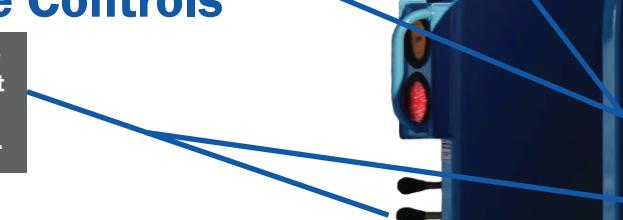

Rugged Hopper

Our hopper floor is constructed of 3/16" Hardox 450 with a 1/4" AR 400 shelf liner and 3/16" Hardox 450 sides creating a hardy concoction that makes for an extremely resilient, long-lasting, machine.

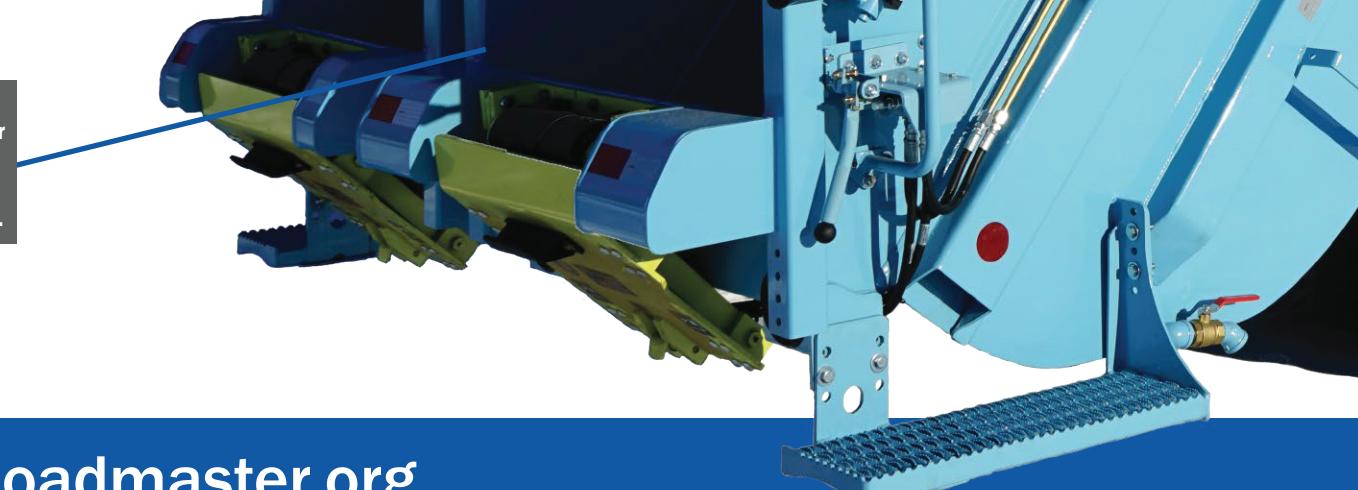



Customized to Your Route

Loadmaster has a long list of add-ons and options with every product line. The Enviromaster DT is not exception. Give your local Loadmaster dealer a call to learn what we can do for you.

Easy Body Access

Body access doors are standard on both sides of the Enviromaster DT. This feature allows for hassle-free maintenance of ejectors and inner body chambers.

Independent Body Control Valves


Independent body control valves for payload-eject, tailgate locks, and tailgate lift functions for each side of the Enviromaster DT means safe, contamination free dumping of payload

Frame Mounted Oil Tank

The Enviromaster DT comes standard with a 60-gallon frame mounted oil tank fitted with a 100 mesh suction filter and a 10 micron microglass tank top return filter, ensuring clean, free-flowing oil is available to effectively power all hydraulic functions



Tandem Axle Enviromaster DT

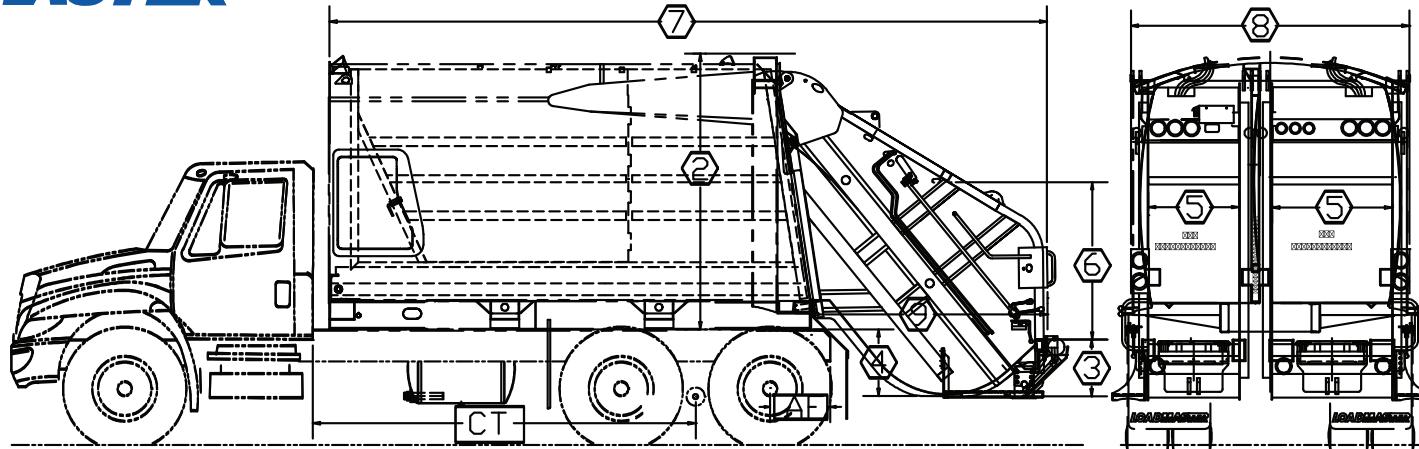

Dimensional Specifications

| | | | | |
|----|---------------------------------------|---------------------------------|------------|------------|
| 1 | Available Body Volumes | 20 yd | 25 yd | 27 yd |
| 2 | Height Above Chassis Frame | 97 1/2" | 97 1/2" | 97 1/2" |
| 3 | Depth of Hopper | 19" | 19" | 19" |
| 4 | Hopper Below Chassis Frame | 25 1/2" | 25 1/2" | 25 1/2" |
| 5 | Hopper Inside Width | 31 1/2" for 40 - 41 1/2" for 60 | | |
| 6 | Hopper Opening Height | 58" | 58" | 58" |
| 7 | Overall Length | 250" | 273" | 289" |
| 8 | Overall Width | 96" | 96" | 96" |
| 9 | Rear of Body to Rear of Tailgate | 82" | 82" | 82" |
| 10 | Approximate Body Weight | 20,400 lbs | 21,100 lbs | 21,500 lbs |
| 11 | Load Sill Below Chassis Frame | 2 1/2" | 2 1/2" | 2 1/2" |
| 12 | Hopper Capacity | 1.1 yd for 40 - 1.7 yd for 60 | | |
| 13 | Height Above Frame (With Gate Raised) | 174" | 174" | 174" |

Standard Material Specifications


| | |
|-----------------------|----------------------------------|
| Body Sides | 8 gauge grade 80 |
| Body Floor | 3/16" AR 400 |
| Body Roof | 8 gauge grade 80 |
| Floor Longitudinals | 3" x 10" x 3/16" boxed channel |
| Ejector Track channel | 1/4" elevated channel |
| Lower Tailgate Sides | 3/16" Hardox 450 |
| Upper Tailgate Sides | 3/16" Hardox 450 in sweep zone |
| Hopper Floor | 10 gauge grade 80 above |
| Separator Panel | 3/16" Hardox 450 |
| Ejector Face Panel | (with 1/4" AR 400 shelf doubler) |
| Ejector Shoes | 3/16" AR 235 abrasion resistant |
| Sweep Face Panel | 3/16" Grade 50 |
| Slide Face Panel | Nylatron NSM |
| Slide Blade Shoes | 3/16" T-1 alloy |
| | 7 gauge Grade 80 |
| | Nylatron NSM |

Loadmaster's dedication to customer service and satisfaction means we will modify and customize options and features to meet the unique demands of any customer's route. To learn more about what Loadmaster can do for you, give your local dealership a call.

Chassis Recommendations

| Body Size | Min. GVWR | Min. Front AWR | Min. Rear AWR | CT | Min. AF |
|-----------|-----------|----------------|---------------|------|---------|
| 20 yd | 48,000 | 12,000 | 36,000 | 136" | 24" |
| 25 yd | 50,000 | 12,000 | 38,000 | 158" | 24" |
| 27 yd | 52,000 | 12,000 | 40,000 | 170" | 24" |

Single Rear Axle Enviromaster DT

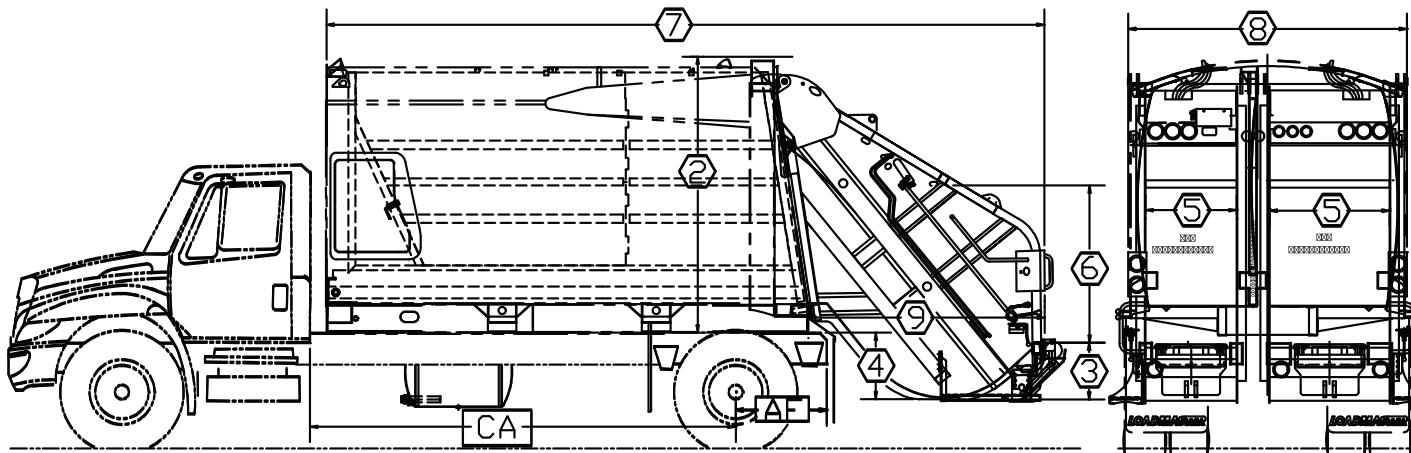

Dimensional Specifications

| 1 | Available Body Volumes | 16 yd | 18 yd | 20 yd |
|----|---------------------------------------|---------------------------------|------------|------------|
| 2 | Height Above Chassis Frame | 97 1/2" | 97 1/2" | 97 1/2" |
| 3 | Depth of Hopper | 19" | 19" | 19" |
| 4 | Hopper Below Chassis Frame | 25 1/2" | 25 1/2" | 25 1/2" |
| 5 | Hopper Inside Width | 31 1/2" for 40 - 41 1/2" for 60 | | |
| 6 | Hopper Opening Height | 58" | 58" | 58" |
| 7 | Overall Length | 222" | 239" | 250" |
| 8 | Overall Width | 96" | 96" | 96" |
| 9 | Rear of Body to Rear of Tailgate | 82" | 82" | 82" |
| 10 | Approximate Body Weight | 19,100 lbs | 19,500 lbs | 19,900 lbs |
| 11 | Load Sill Below Chassis Frame | 2 1/2" | 2 1/2" | 2 1/2" |
| 12 | Hopper Capacity | 1.1 yd for 40 - 1.7 yd for 60 | | |
| 13 | Height Above Frame (With Gate Raised) | 174" | 174" | 174" |

Chassis Recommendations

| Body Size | Min. GVWR | Min. Front AWR | Min. Rear AWR | CA | Min. AF |
|-----------|-----------|----------------|---------------|------|---------|
| 16 yd | 40,000 | 12,000 | 28,000 | 128" | 34" |
| 18 yd | 42,000 | 14,000 | 28,000 | 140" | 34" |
| 20 yd | 45,000 | 14,000 | 31,000 | 152" | 34" |

Standard Material Specifications

| | |
|-----------------------|----------------------------------|
| Body Sides | 8 gauge grade 80 |
| Body Floor | 3/16" AR 400 |
| Body Roof | 8 gauge grade 80 |
| Floor Longitudinals | 3" x 10" x 3/16" boxed channel |
| Ejector Track channel | 1/4" elevated channel |
| Lower Tailgate Sides | 3/16" Hardox 450 |
| Upper Tailgate Sides | 3/16" Hardox 450 in sweep zone |
| Hopper Floor | 10 gauge grade 80 above |
| Separator Panel | 3/16" Hardox 450 |
| Ejector Face Panel | (with 1/4" AR 400 shelf doubler) |
| Ejector Shoes | 3/16" AR 235 abrasion resistant |
| Sweep Face Panel | 3/16" Grade 50 |
| Slide Face Panel | Nylatron NSM |
| Slide Blade Shoes | 3/16" T-1 alloy |
| | 7 gauge Grade 80 |
| | Nylatron NSM |



CITY VIEW
SPECIALTY VEHICLES



Loadmaster reserves the right to change specifications without notice and without obligation to install them on units sold. Information published is informational only and shall not be construed to warrant suitability of the unit for any particular purpose as performance may vary with the conditions encountered. Illustrations shown may include optional equipment and accessories, and may not include all standard equipment.