

LOADMASTER™



CITY VIEW
SPECIALTY VEHICLES



Elite



The Loadmaster Elite is our small, high compaction 1000 pound per yard refuse body. The Elite is available in 6,8,10, and 11 yd sizes all available on under CDL chassis. Allowing access to tight areas like driveways and sidewalks.



906.563.9226 | www.loadmaster.org



416.249.4500 | cityviewvehicles.com




Your safety is a top priority, we offer many different lighting packages. Flush mount strobe systems, flashing light bars, directional indicators, etc.

Heavy duty packing blades with a 3/16" sweep blade face and a 7ga slide blade face.

Full 1000 pounds per yard compaction and a one yard hopper capacity makes the Elite a compact but productive machine.

Cart tippers and container lifting options available. Container latch kit and hydraulic drum winch for lifting rear load containers available.

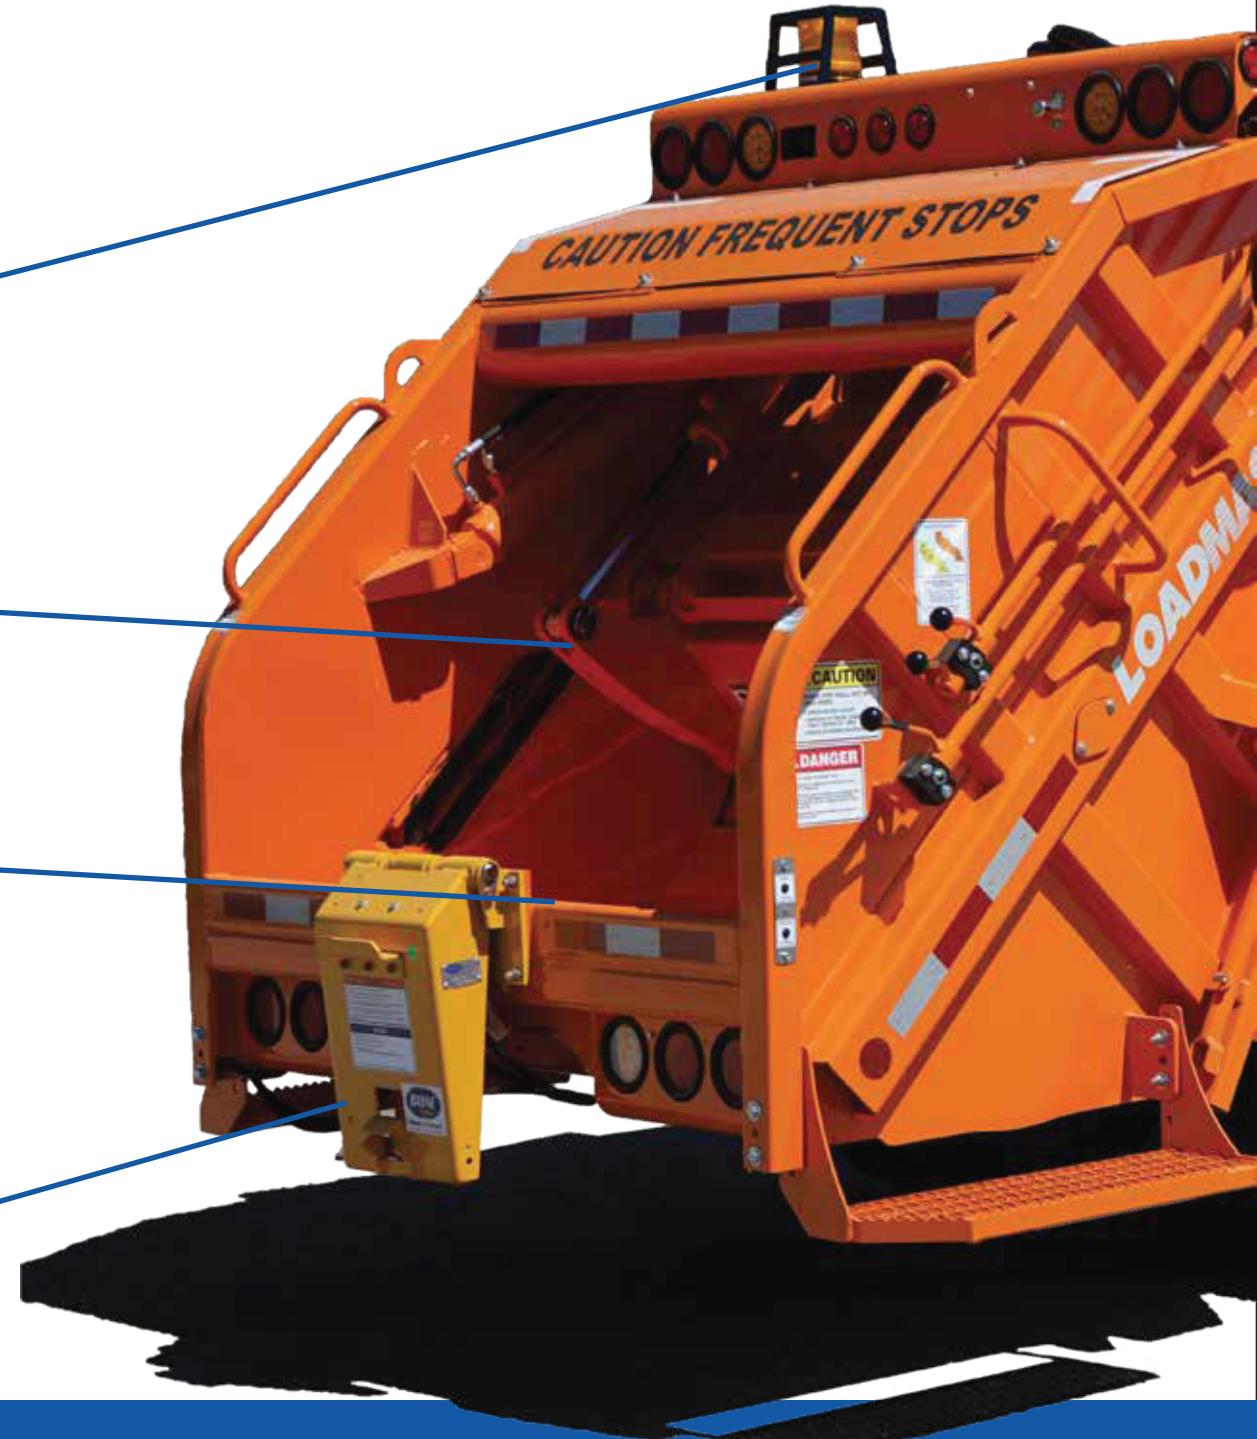




Strong, smooth, curved 10 gauge high tensile body sides. Designed to look good on any chassis. The smooth sides provide a good surface for decals, signs and other advertising. 10 ga high tensile body sides, 10 ga high tensile body roof, 3/16" body floor.

The Elite is available on under CDL chassis Isuzu, Chevrolet, Ford, Dodge and others. Minimum GVWR of 17,000 for the 6 cu. yd. Elite body.

Auto locks standard, the Elite is equipped with autolocks actuated automatically when the tailgate lift handle is operated.

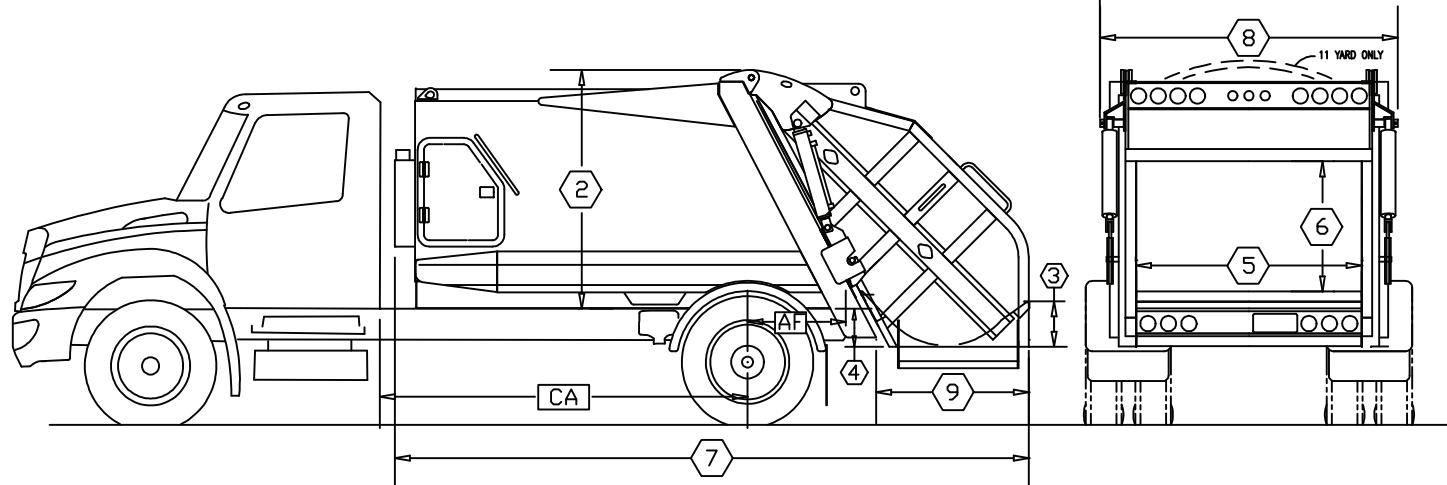

Dimensional Specifications

1	Available Body Volumes	6 yd	8 yd	10 yd	11 yd
2	Height Above Chassis Frame	69 3/4"	69 3/4"	69 3/4"	73 1/4"
3	Depth of Hopper	13"	13"	13"	13"
4	Hopper Below Chassis Frame	11"	11"	11"	11"
5	Hopper Inside Width	66"	66"	66"	66"
6	Hopper Opening Height	41"	41"	41"	41"
7	Overall Length	161 3/4"	185 3/4"	209 3/4"	209 3/4"
8	Overall Width	85 1/2"	85 1/2"	85 1/2"	85 1/2"
9	Rear of Body to Rear of Tailgate	44 3/4"	44 3/4"	44 3/4"	44 3/4"
10	Approximate Body Weight (lbs.)	7,200	7,700	8,200	8,500
11	Load Sill Below Chassis Frame	2"	2"	2"	2"
12	Hopper Capacity	1 yd	1 yd	1 yd	1 yd
13	Height Above Frame (With Gate Raised)	118	118	118	118

Chassis Notes

All chassis must have ahead of rear axle fuel tank. It is the dealers responsibility to make sure to order ahead of rear axle fuel tank, if a truck arrives at Loadmaster the dealer will be charged.

For the Elite 8 the Isuzu wheelbase 132.5" is the correct wheelbase, and horizontal exhaust is needed.

For the Elite 6 the Isuzu wheelbase 132.5" is the workable Isuzu wheelbase there will be a significant cab gap this space can be taken up by the verticle exhaust or a tool box.



Loadmaster's dedication to customer service and satisfaction means we will modify and customize options and features to meet the unique demands of any customer's route. To learn more about what Loadmaster can do for you, give your local dealership a call.

Chassis Recommendations

Body Size	Min. GVWR	CA	Min. AF
6 yd	17,000	85"	34"
8 yd	21,000	108"	34"
10 yd	25,500	134"	34"
11 yd	25,500	134"	34"

Standard Material Specifications

Body Sides	10 gauge grade 80
Body Floor	3/16" gauge
Body Roof	10 gauge grade 80
Floor Longitudinals	3" x 8" x 3/16" boxed channel
Ejector Track channel	1/4" elevated channel
Lower Tailgate Sides	3/16" T-1
Upper Tailgate Sides	10 ga grade 80
Hopper Floor	3/16" T-1
Separator Panel	3/16" T-1 abrasion resistant
Ejector Face Panel	10 ga high tensile
Ejector Shoes	UHMW
Sweep Face Panel	3/16" T-1 alloy
Slide Face Panel	7 gauge Grade 80
Slide Blade Shoes	Nylatron NSM & UHMW



CITY VIEW
SPECIALTY VEHICLES



Loadmaster reserves the right to change specifications without notice and without obligation to install them on units sold. Information published is informational only and shall not be construed to warrant suitability of the unit for any particular purpose as performance may vary with the conditions encountered. Illustrations shown may include optional equipment and accessories, and may not include all standard equipment.